Tecn@Static

Electrostatic Technology

TS 300 High performance professional

electrostatic sprayer

The TS 300 electrostatic sprayer is a portable equipment

that allows disinfecting all types of spaces in a professional, efficient and profitable way. Very functional equipment that allows the user to connect it to a mini battery or mains compressor. Its great manoeuvrability makes the TS 300 ideal for carrying out work in different spaces of all types of installations, whatever their size. It is fast, effective and offers great coverage.

CHARACTERISTICS

- High impact polymer structure case
- 1,400 ml bottle
- Stainless steel connectors
- Belt for bottle of disinfectant liquid
- 6m air hose
- Lightweight for daily use
- Very practical and comfortable to transport
- Uniform coverage
- Silent

Dimensions	53 x 40 x 22 cm
Net weight	7 Kg
Weight with packaging	7.4 Kg
Gun batteries	2 un. of 9V
Flow rate	Up to 90 ml/min
Drop size	40 microns
Tank capacity	I.4 Lts



MADE IN SPAIN


Complies with EC regulations



Using the very latest technology TECHNICAL SERVICE 24/48 HRS We will be in touch quickly and efficiently

Tecn@Static Electrostatic Technology

WTCZ. C/ María Zambrano nº31, Torre Oeste, planta 15. 50018 Zaragoza (España) (+34) 876 771 405 o Madrid (+34) 91 060 71 00 • info@tecnostatic.com • www.tecnostatic.com

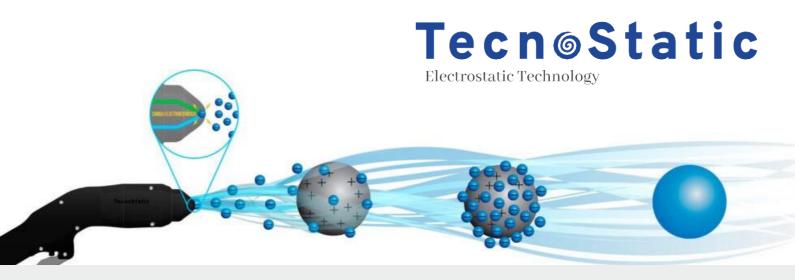

THE ALL-ENCOMPASSING ELECTROSTATIC TECHNOLOGY OF THE TS 300

The disinfectant solution for spaces and utensils for all sectors and industries

The TS 100 works through electrostatic spraying, avant-garde technology patented by TecnoStatic. The "all-encompassing" nature of this machine provides a 360° disinfection, enabling savings in disinfectant solution, time and labour.

The electrostatic spraying works by applying an electric charge to the disinfectant liquid. When these liquids are sprayed, the droplets are attracted to the surfaces which have the opposite electric charge, adhering to these surfaces exactly and uniformly.

The TS 100 provides greater cleanliness than any conventional system out there, as it reaches every last nook and cranny, coating the surface of any object present. You can connect it to any standard compressor on the market that functions on battery or with connection to the electrical network, with a minimum flow rate of 90 L / m and 3 bar.





COVERAGE Spraying is uniform and precise, covering even the least accessible of areas



ASEPSIS GUARANTEED

You do not need to move the surfaces or objects



PREVENTION OF CROSS-CONTAMINATION

Avoid bacteria, germs or viruses spreading from one surface to another



QUICKER DRYING TIME

Spraying leaves a super-fine layer that dries really quickly



NOTABLE SAVINGS MADE Significantly quicker application times



ENVIRONMENTALLY FRIENDLY

> Uses only the minimum chemical products required



WTCZ. C/ María Zambrano nº31, Torre Oeste, planta 15. 50018 Zaragoza (España) (+34) 876 771 405 o Madrid (+34) 91 060 71 00 • info@tecnostatic.com • www.tecnostatic.com